

Installation and Setup Guide

GENERAL INFORMATION

The **PROWIFIZW-EU** Communication Module allows PRO Series Control Panels to communicate with the Central Station, PRO Series Wireless Touchscreens, and Amazon Alexa via Wi-Fi. This communications module is intended to provide compatible Control Panels with a Wi-Fi connection as well as connection with and the ability to control Z-Wave devices. The module connects directly to the Control Panel and is powered via the Control Panel's connection. Refer to the applicable Control Panel's Installation and Setup Guide for additional information.

NOTE: Installation shall be done in accordance with local regulations.

INSTALLING

Install the Wi-Fi module **[A]** as follows (figure 1):

NOTE: Ensure that all electrical power is removed from the control before installing the module.

1. If the Control Panel is not powered up, proceed to step 3.
2. If the Control Panel is powered up:
 - Disarm the system and wait 30-60 seconds.
 - Unplug the power supply.
 - Remove the screw that secures the control panel to the wall.
 - Remove the control from the wall or the desk mount.
 - Disconnect the battery.
3. Insert the W-Fi module into the slot on the left side of the control as shown in Figure 1 and ensure the receptacle is securely seated on the edge connector.
4. Secure the module to the control with screw.
5. If applicable:
 - Connect the battery.
 - Install the control panel on the wall and secure with the screw.
 - Connect the power supply into a 24-hour, 230 VAC unswitched outlet.

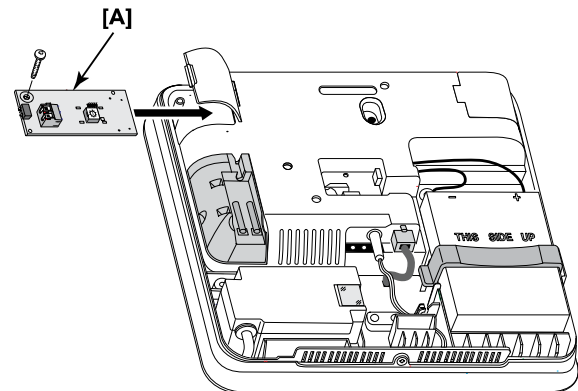


Figure 1. Installing the Wi-Fi Module

PROGRAMMING

Note: The module requires a router and internet service for Wi-Fi connection.

1. Programming associated with the module, as well as the inclusion/exclusion of Z-Wave devices, is conducted through the AlarmNet 360™ cloud-based management platform, using the Resideo Pro App.
The keypad must be enrolled in the Control Panel before it can be used.
2. When programming is complete, perform a Communications Test.

SPECIFICATIONS

Dimensions (mm) / Weight 40 (W) x 67 (L) x 10 (H) / 20 g

Operating temperature: -10°C ~ +55°C

Input voltage range: 3.6 – 14v, max 17v

Input voltage: 3.5v

Current drain: 250ma



The product should not be disposed of with other household waste. Check for the nearest authorized collection centers or authorized recyclers. The correct disposal of end-of-life equipment will help prevent potential negative consequences for the environment and human health.

Product must be tested at least once each year

Any attempt to reverse-engineer this device by decoding proprietary protocols, de-compiling firmware, or any similar actions is strictly prohibited.

IMPORTANT SECURITY NOTICE

Please inform the User about the security importance of their wireless key (key fob), and what to do if it is lost. Explain that the key fob is similar to their keys or access card. If lost or stolen, their security system could be compromised. They should immediately notify the Dealer/Installer of a lost or stolen key fob. The Dealer/Installer will then remove the key fob programming from the security system.

REFER TO THE INSTALLATION INSTRUCTIONS FOR THE CONTROL PANEL WITH WHICH THIS DEVICE IS USED, FOR DETAILS REGARDING LIMITATIONS OF THE ENTIRE ALARM SYSTEM.

SUPPORT & WARRANTY INFORMATION

For the latest documentation, warranty, and support, please go to: www.resideo.com



Sécurité Communications SAS (SECOM)
1198, Avenue du Docteur Maurice Donat
06250 Mougins - FRANCE



Ademco 1 Ltd., 200 Berkshire Place
Winnersh Triangle, Berkshire,
RG41 5RD – UNITED KINGDOM

PROWIFIZW-EU



R800-26502A 10/21 Rev A

resideo

© 2021 Resideo Technologies, Inc.
www.resideo.com